





DEGSON ELECTRONICS CO., LTD.


Product Specification

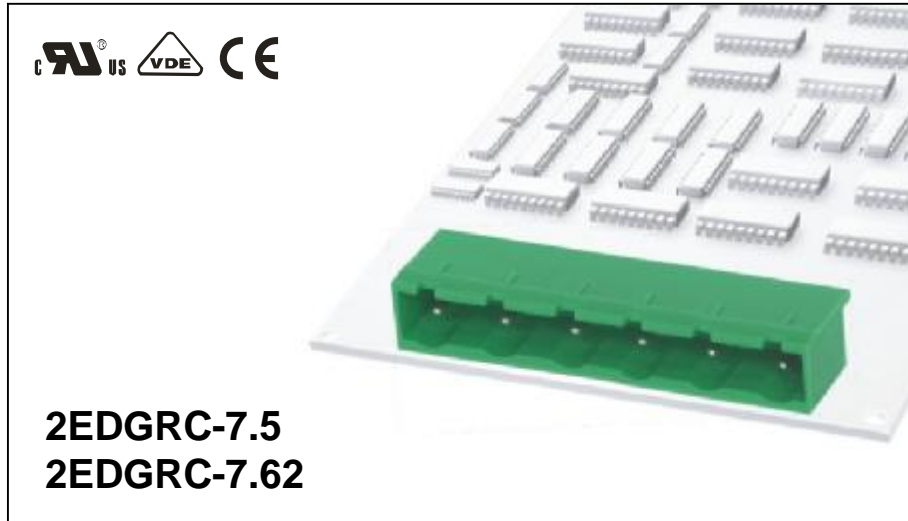

| | | |
|----------------------|----------------------------|------------|
| APPROVAL | | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 400V |
| Rated current | 15A | 20A |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C ~ +105 °C | |
| Dimensions | | |
| Pitch | 7.5mm(.295") 7.62mm(.300") | |
| Poles | 2P-12P | |
| Material | | |
| Housing | PA66,UL94 V-0 | |
| Pin header | Brass,Tin-plated | |

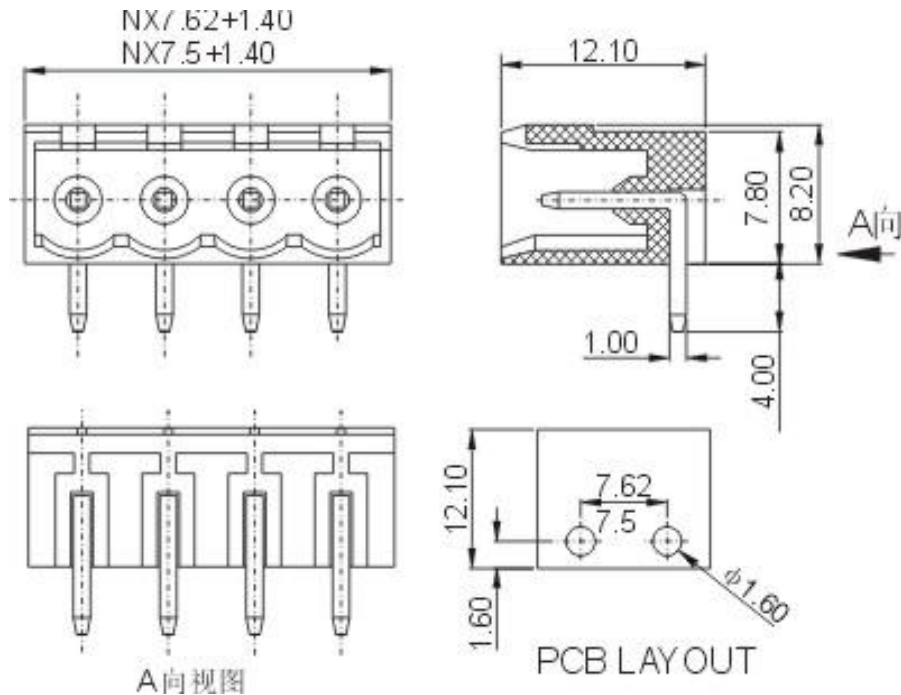

HOW TO ORDER :

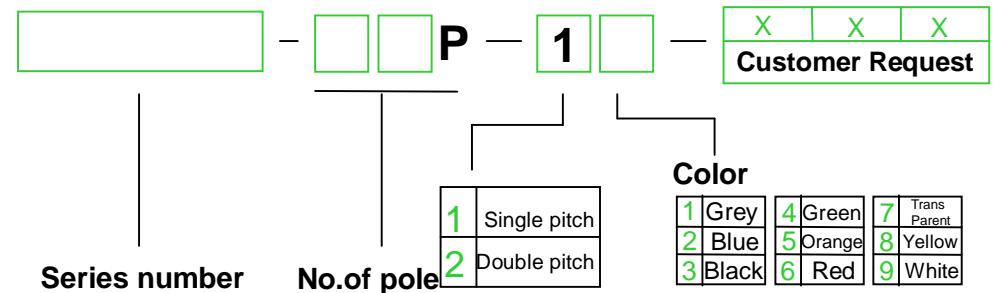

| | |
|---------------------------|--|
| mm (INCH) | DEGSON ELECTRONICS CO., LTD. |
| THROUGHTLE PROJECTION | NAME 2EDGRC-7.5 2EDGRC-7.62 |