



Leading Through Innovation



HSS, HSS-E & HSSCo8

STRAIGHT SHANK DRILLS

BOHRER MIT ZYLINDERSCHAFT

- For General Purpose (Soft & Tough Materials)
- Für allgemeine Anwendungen (weiche & zähe Materialien)

SELECTION GUIDE



SERIES	D2107	D1107	D2105
STANDARD	DIN1897	DIN1897	DIN338
LENGTH	STUB	STUB	JOBBER
SIZE MIN	D1.0	D1.0	D1.0
SIZE MAX	D31.0	D13.0	D20.0
PAGE	A220	A224	A227

SURFACE TREATMENT	Gold Coloring	Steam Tempered	Gold Coloring
-------------------	---------------	----------------	---------------

HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS

For General Purpose (Soft & Tough Materials)



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A262

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	○	○	○
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32	○	○	○
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○
	11		Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	◎
	13		Martensitic Quenched & Tempered	240	23	○	○	○
	14		Austenitic	180	10	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○
	18		Pearlitic	250	25			
	19		Ferritic	130		○	○	○
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○
	22		Curable Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
28		CuSn, lead-free copper and electrolytic copper	100					
29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				○	○	○
30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Cured	350	38			
	35		Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40		Cast	400	42			
41	Hardened Cast Iron	Hardened	550	55				

DL105	D1105	D1125	D2104	D1121	DL109	D1100	D1106
DIN338	DIN338	DIN338	DIN340	DIN1869/1	DIN338	DIN338	DIN338
JOBBER	JOBBER	JOBBER	LONG	EXTRA LONG	JOBBER	JOBBER	JOBBER
D1.0	D0.3	D2.0	D2.0	D2.0	D1.5	D1.5	D1.5
D20.0	D20.0	D20.0	D12.0	D13.0	D13.0	D13.0	D13.0
A230	A233	A238	A241	A243	A244	A245	A247
Gold Coloring	Steam Tempered	Bright	Gold Coloring	Steam Tempered	Bright		



◎	◎	◎	◎	◎	◎			1
◎	◎	◎	◎	◎	◎			2
◎	◎	◎	◎	◎	◎			3
○	○	○	○	○	○			4
								5
◎	◎	◎	◎	◎	◎			6
○	○	○	○	○	○			7
○	○	○	○	○	○			8
								9
○	○	○	○	○	○			10
								11
◎	○	○	◎	○	◎			12
○	○	○	○	○	○			13
○	○	○	○	○	○			14
○	○	○	○	○	○			15
○	○	○	○	○	○			16
○	○	○	○	○	○			17
								18
○	○	○	○	○	○			19
								20
○	○	○	○	○	○		◎	21
○	○	○	○	○	○		◎	22
○	○	○	○	○	○		◎	23
							◎	24
								25
								26
								27
○	○	○	○	○	○		◎	28
								29
								30
								31
								32
								33
								34
○	○	○	○	○	○			35
								36
								37
								38
								39
								40
								41

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

STUB

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT

EXTRA KURZ

Forets HSSCo8, queue cylindrique, Forme C, série extra-courte

EXTRA-COURTE

PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


EXTRA CORTA

Surface treatment : Coloring(Gold color)



Oberflächenbehandlung : Coloring(Goldfarbe)

Application : Suitable for drilling thin materials with portable electric drills. Special twist drills for automatic and turret lathes

Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

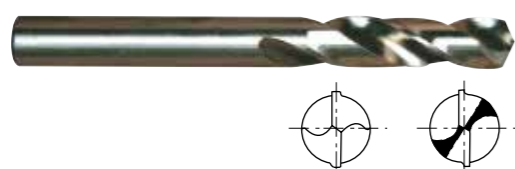

under 1.6mm 1.6mm & over

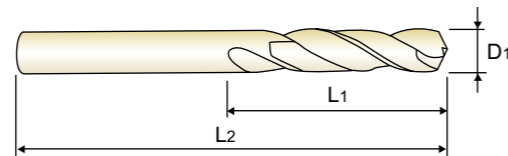

Unit : mm

EDP No.	Drill Diameter		Overall Length	EDP No.	Drill Diameter		Overall Length
	D1	L1			D1	L1	
D2107010	1.0	6	26	D2107032	3.2	18	49
D2107011	1.1	7	28	D2107932	3.25	18	49
D2107012	1.2	8	30	D2107033	3.3	18	49
D2107912	1.25	8	30	D2107034	3.4	20	52
D2107013	1.3	8	30	D2107035	3.5	20	52
D2107014	1.4	9	32	D2107036	3.6	20	52
D2107015	1.5	9	32	D2107037	3.7	20	52
D2107016	1.6	10	34	D2107937	3.75	20	52
D2107017	1.7	10	34	D2107038	3.8	22	55
D2107917	1.75	11	36	D2107039	3.9	22	55
D2107018	1.8	11	36	D2107040	4.0	22	55
D2107019	1.9	11	36	D2107041	4.1	22	55
D2107020	2.0	12	38	D2107042	4.2	22	55
D2107021	2.1	12	38	D2107942	4.25	22	55
D2107022	2.2	13	40	D2107043	4.3	24	58
D2107922	2.25	13	40	D2107044	4.4	24	58
D2107023	2.3	13	40	D2107045	4.5	24	58
D2107024	2.4	14	43	D2107046	4.6	24	58
D2107025	2.5	14	43	D2107946	4.65	24	58
D2107026	2.6	14	43	D2107047	4.7	24	58
D2107027	2.7	16	46	D2107947	4.75	24	58
D2107927	2.75	16	46	D2107048	4.8	26	62
D2107028	2.8	16	46	D2107049	4.9	26	62
D2107029	2.9	16	46	D2107050	5.0	26	62
D2107030	3.0	16	46	D2107051	5.1	26	62
D2107031	3.1	18	49	D2107052	5.2	26	62

HSS-E(DL107) is available on your request.
 TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

STUB

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT

EXTRA KURZ

Forets HSSCo8, queue cylindrique, Forme C, série extra-courte

EXTRA-COURTE

PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


EXTRA CORTA

Surface treatment : Coloring(Gold color)


Oberflächenbehandlung : Coloring(Goldfarbe)

Application : Suitable for drilling thin materials with portable electric drills. Special twist drills for automatic and turret lathes

Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

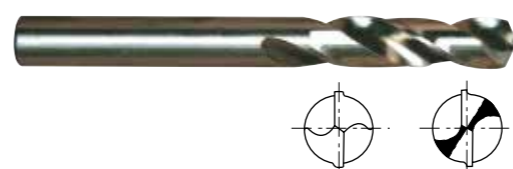

under 1.6mm 1.6mm & over

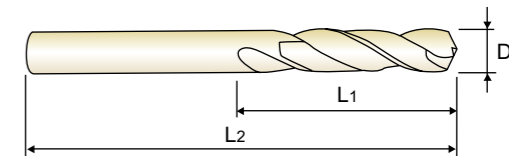

Unit : mm

EDP No.	Drill Diameter		Overall Length	EDP No.	Drill Diameter		Overall Length
	D1	L1			L2	D1	
D2107952	5.25	26	62	D2107073	7.3	34	74
D2107053	5.3	26	62	D2107074	7.4	34	74
D2107054	5.4	28	66	D2107974	7.45	34	74
D2107055	5.5	28	66	D2107075	7.5	34	74
D2107955	5.55	28	66	D2107076	7.6	37	79
D2107056	5.6	28	66	D2107077	7.7	37	79
D2107057	5.7	28	66	D2107977	7.75	37	79
D2107957	5.75	28	66	D2107078	7.8	37	79
D2107058	5.8	28	66	D2107079	7.9	37	79
D2107059	5.9	28	66	D2107080	8.0	37	79
D2107060	6.0	28	66	D2107081	8.1	37	79
D2107061	6.1	31	70	D2107082	8.2	37	79
D2107062	6.2	31	70	D2107982	8.25	37	79
D2107962	6.25	31	70	D2107083	8.3	37	79
D2107063	6.3	31	70	D2107084	8.4	37	79
D2107064	6.4	31	70	D2107085	8.5	37	79
D2107065	6.5	31	70	D2107086	8.6	40	84
D2107066	6.6	31	70	D2107087	8.7	40	84
D2107067	6.7	31	70	D2107987	8.75	40	84
D2107967	6.75	34	74	D2107088	8.8	40	84
D2107068	6.8	34	74	D2107089	8.9	40	84
D2107069	6.9	34	74	D2107090	9.0	40	84
D2107070	7.0	34	74	D2107091	9.1	40	84
D2107071	7.1	34	74	D2107092	9.2	40	84
D2107072	7.2	34	74	D2107992	9.25	40	84
D2107972	7.25	34	74	D2107093	9.3	40	84

HSS-E(DL107) is available on your request.
 TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

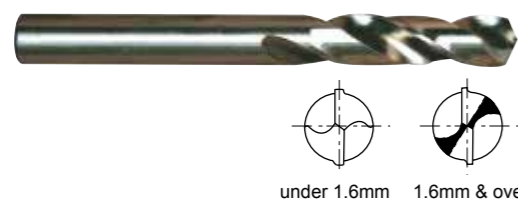

DIN 1897 HSS Co8 33° h8 135° Gold Coloring p.A262

Plain Shank Page ER COLLET CHUCK D73-115

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107993	9.35	40	84	D2107138	13.8	54	107
D2107094	9.4	40	84	D2107140	14.0	54	107
D2107095	9.5	40	84	D2107842	14.25	56	111
D2107096	9.6	43	89	D2107145	14.5	56	111
D2107097	9.7	43	89	D2107847	14.75	56	111
D2107997	9.75	43	89	D2107150	15.0	56	111
D2107098	9.8	43	89	D2107852	15.25	58	115
D2107099	9.9	43	89	D2107155	15.5	58	115
D2107100	10.0	43	89	D2107857	15.75	58	115
D2107102	10.2	43	89	D2107160	16.0	58	115
D2107802	10.25	43	89	D2107862	16.25	60	119
D2107105	10.5	43	89	D2107165	16.5	60	119
D2107807	10.75	47	95	D2107867	16.75	60	119
D2107110	11.0	47	95	D2107170	17.0	60	119
D2107812	11.25	47	95	D2107872	17.25	62	123
D2107115	11.5	47	95	D2107175	17.5	62	123
D2107817	11.75	47	95	D2107877	17.75	62	123
D2107118	11.8	47	95	D2107180	18.0	62	123
D2107120	12.0	51	102	D2107882	18.25	64	127
D2107822	12.25	51	102	D2107185	18.5	64	127
D2107125	12.5	51	102	D2107887	18.75	64	127
D2107827	12.75	51	102	D2107190	19.0	64	127
D2107130	13.0	51	102	D2107892	19.25	66	131
D2107832	13.25	54	107	D2107195	19.5	66	131
D2107135	13.5	54	107	D2107897	19.75	66	131
D2107837	13.75	54	107	D2107200	20.0	66	131

► HSS-E(DL107) is available on your request.
► TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○										

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

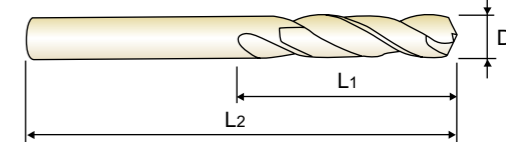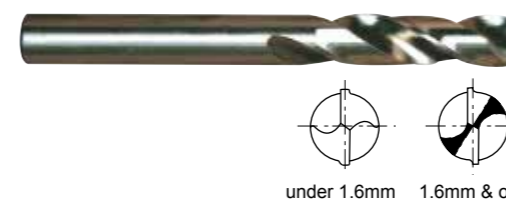

DIN 1897 HSS Co8 33° h8 135° Gold Coloring p.A262

Plain Shank Page ER COLLET CHUCK D73-115

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107205	20.5	68	136	D2107245	24.5	75	151
D2107210	21.0	68	136	D2107250	25.0	75	151
D2107215	21.5	70	141	D2107260	26.0	78	156
D2107220	22.0	70	141	D2107270	27.0	81	162
D2107225	22.5	72	146	D2107280	28.0	81	162
D2107230	23.0	72	146	D2107290	29.0	84	168
D2107235	23.5	72	146	D2107300	30.0	84	168
D2107240	24.0	75	151	D2107310	31.0	87	174

► HSS-E(DL107) is available on your request.
► TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P									M					K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○										



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D2107, D1107, D2105, DL105, D1105, D1125, D2104, D1121, DL109 SERIES

HSS, HSS-E & HSSCo8 COBALT DRILLS

VC = M/MIN
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)												
					2.0	3.0	4.0	6.0	8.0	10.0	13.0	16.0	18.0	20.0	30.0		
P	1	Non-alloy steel	30	RPM	4770	3180	2390	1590	1190	950	730	600	530	480	320		
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28		
			25	RPM	3980	2650	1990	1330	990	800	610	500	440	400	270		
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28		
	20		RPM	3180	2120	1590	1060	800	640	490	400	350	320	210			
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28			
	20		RPM	3180	2120	1590	1060	800	640	490	400	350	320	210			
			FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18			
	25	RPM	3980	2650	1990	1330	990	800	610	500	440	400	270				
		FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28				
20	RPM	3180	2120	1590	1060	800	640	490	400	350	320	210					
	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28					
20	RPM	3180	2120	1590	1060	800	640	490	400	350	320	210					
	FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18					
20	RPM	3180	2120	1590	1060	800	640	490	400	350	320	210					
	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28					
10	High alloyed steel, and tool steel	15	RPM	2390	1590	1190	800	600	480	370	300	270	240	160			
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28			
M	12	Stainless steel	20	RPM	3180	2120	1590	1060	800	640	490	400	350	320	210		
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28		
				RPM	2390	1590	1190	800	600	480	370	300	270	240	160		
10	15	15	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28			
			RPM	1590	1060	800	530	400	320	240	200	180	160	110			
			FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18			
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190	950	730	600	530	480	320		
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28		
			25	RPM	3980	2650	1990	1330	990	800	610	500	440	400	270		
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18		
30	RPM	4770	3180	2390	1590	1190	950	730	600	530	480	320					
	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28					
25	RPM	3980	2650	1990	1330	990	800	610	500	440	400	270					
	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28					
N	21	Aluminum-wrought alloy	55	RPM	8750	5840	4380	2920	2190	1750	1350	1090	970	880	580		
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38		
	55		RPM	8750	5840	4380	2920	2190	1750	1350	1090	970	880	580			
			FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38			
	40		RPM	6370	4240	3180	2120	1590	1270	980	800	710	640	420			
			FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38			
20	RPM	3180	2120	1590	1060	800	640	490	400	350	320	210					
	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28					
10	Titanium Alloys	10	RPM	1590	1060	800	530	400	320	240	200	180	160	110			
			FEED	0.01~0.03	0.02~0.04	0.03~0.05	0.04~0.07	0.05~0.08	0.05~0.09	0.06~0.10	0.05~0.11	0.06~0.12	0.09~0.13	0.12~0.18			



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D1100 SERIES **HSS, TWIST DRILLS for BRASS / BRONZE**

VC = M/MIN
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)									
					1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0	
N	27	Copper and Copper Alloys (Bronze / Brass)	45	RPM	9550	7160	4770	3580	2860	2390	1790	1430	1100	
				FEED	0.03~0.06	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.12~0.16	0.16~0.20	0.19~0.25	0.22~0.32	
30	RPM		6370	4770	3180	2390	1910	1590	1190	950	730			
	FEED		0.01~0.03	0.02~0.05	0.03~0.06	0.04~0.08	0.05~0.09	0.07~0.11	0.09~0.13	0.10~0.16	0.11~0.21			

D1106 SERIES **HSS, TWIST DRILLS for ALUMINUM**

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)									
					1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0	
N	21	Aluminum-wrought alloy	50	RPM	10610	7960	5310	3980	3180	2650	1990	1590	1220	
				FEED	0.03~0.06	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35	
	22		RPM	10610	7960	5310	3980	3180	2650	1990	1590	1220		
			FEED	0.03~0.06	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35		
23	Aluminum-cast, alloyed	40	RPM	8490	6370	4240	3180	2550	2120	1590	1270	980		
			FEED	0.03~0.06	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35		
30		RPM	6370	4770	3180	2390	1910	1590	1190	950	730			
		FEED	0.01~0.04	0.03~0.06	0.03~0.07	0.04~0.08	0.05~0.09	0.04~0.10	0.06~0.12	0.10~0.16	0.12~0.22			