
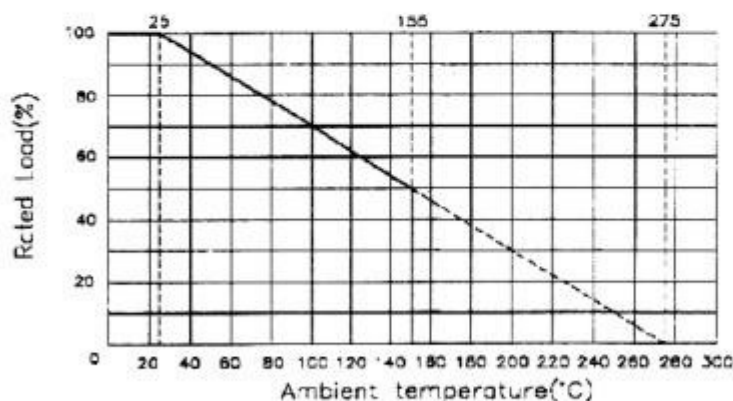


(NON - INDUCTIVE)

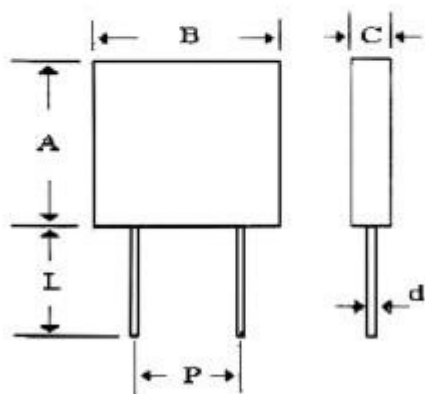

Rated Power	Resistance Range, (Ω)	Dimensions : mm					
		A	B	C	$P \pm 1$	L	d
2W	0.01 Ω - 0.8 Ω	8 ± 1.0	13 ± 1.0	4.5 ± 1.0	9 ± 1.0	7 ± 1	0.6
3W	0.01 Ω - 0.8 Ω	13 ± 1.0	14 ± 1.0	5 ± 1.0		7 ± 1	0.6
5W	0.01 Ω - 6 Ω	18 ± 1.0	14 ± 1.0	5 ± 1.0		7 ± 1	0.8
7W	0.01 Ω - 6.2 Ω	18 ± 1.0	26 ± 1.0	5 ± 1.0	9 ± 1.0	7 ± 1	0.8
10W	0.01 Ω - 6.2 Ω	20 ± 1.0	26 ± 1.0	5 ± 1.0	20 ± 1.0	7 ± 1	0.8

ITEM	SPECIFICATION	REMARKS
Temperature coefficient	0.01~0.099R-1800PPM, 0.1~0.5R-500PPM, above 0.15R-350PPM	
Short time overload	$\pm 2\%$	6.25 times the rated power for 5 seconds
Voltage withstanding	$\pm 2\%$	500V for one minute
Wet load life	$\pm 5\%$	40 °C , 95%RH for 500 hours
High temperature load life	$\pm 5\%$	70 °C for 1000 hours
Flameproof	APSS	
Tolerance	$\pm 5\%$, $\pm 10\%$	

TOLERANCE : $\pm 5\%$, $\pm 10\%$