



Material:Nylon PA,UL94-V0

Seal:NBR

Protection class:IP68/1P69K<(the wire/cable is in clamping range,and assemble O-Ring on the groove.)


Temperature range:Static state: -40°C to 100°C, short term to120°C;

Dynamic state: -20°C to 80°C, short term to 100°C

Product Color: Gray RAL7035

Black RAL9005

Please inquire if the other color requested

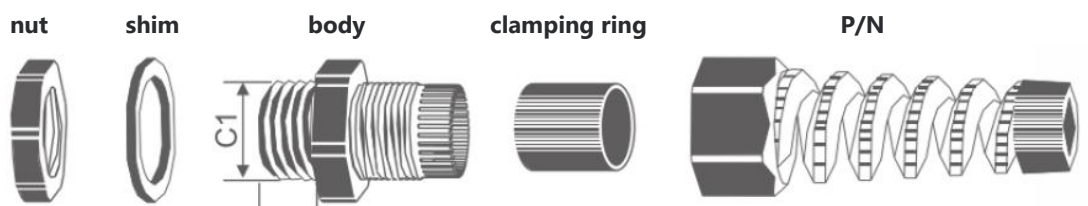

Thread	Cable range	Thread length	height	Wrench diameter	Thread outer diameter	Panel Mounting Hole
	mm	mm	mm	mm	mm	mm
PG7	3-6.5	8	53	15	12.5	12.5-12.8
PG7	2-5	8	53	15	12.5	12.5-12.8
PG9	4-8	8.2	63	19	15.2	15.2-15.5
PG9	2-6	8.2	63	19	15.2	15.2-15.5
PG11	5-10	8.6	78	22	18.6	18.6-18.9
PG11	3-7	8.6	78	22	18.6	18.6-18.9
PG13.5	6.7-12	9	88	24	20.4	20.4-20.7
PG13.5	5-9	9	88	24	20.4	20.4-20.7
PG16	10.2-14	10	98	27	22.5	22.5-22.8
PG16	7-12	10	98	27	22.5	22.5-22.8
PG21	13-18	10	112	33	28.3	28.3-28.6
PG21	9-16	10	112	33	28.3	28.3-28.6

M12×1.5	3-6.5	8	53	15	12	12-12.3
M12×1.5	2-5	8	53	15	12	12-12.3
M16×1.5	4-8	8.2	63	19	16	16-16.3
M16×1.5	2-6	8.2	63	19	16	16-16.3
M20×1.5	6.7-12	9	88	24	20	20-20.3
M20×1.5	5-9	9	88	24	20	20-20.3
M25×1.5	13-18	10	112	33	25	25-25.3
M25×1.5	9-16	10	112	33	25	25-25.3

NPT1/4	3-6.5	8	53	15	13.7	13.7-14
NPT1/4	2-5	8	53	15	13.7	13.7-14
NPT3/8	4-8	15	63	19	17	17-17.3
NPT3/8	2-6	15	63	19	17	17-17.3
NPT1/2	6.7-12	13	88	24	21.2	21.2-21.5
NPT1/2	5-9	13	88	24	21.2	21.2-21.5
NPT3/4	13-18	15	112	33	26.6	26.6-26.9
NPT3/4	9-16	15	112	33	26.6	26.6-26.9



