


ALUMINUM ELECTROLYTIC CAPACITORS	APPROVAL NO.	
	9644	
TDA 100 VS 4700 (M)	SERIES	TDA
	RATING	100 V 4700 μ F
	CASE SIZE	\varnothing 35 × 40 L


A. DIAGRAM OF DIMENSION

[UNIT : mm]

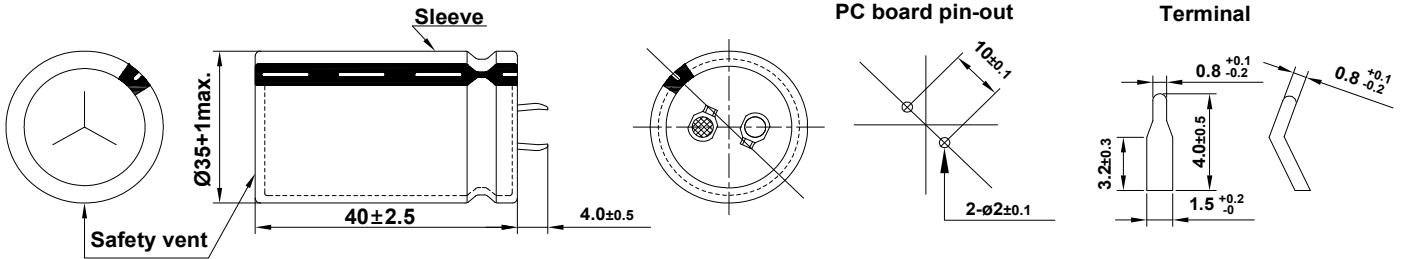


B. MARKING : BROWN SLEEVE & SILVER INK

< VIEW OF CAPACITOR >

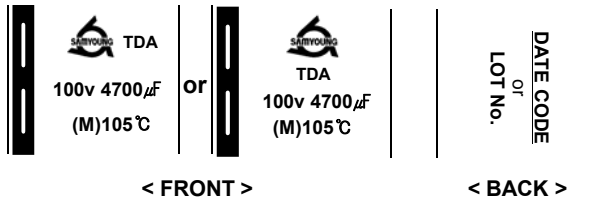


< LOT No. : Sleeve or bottom plate marking. >



- ①: The ending figure of manufactured year in A.D.
- ②: Manufactured month (1, 2, 3, ..., 9, O, N, D)
- ③: Manufactured day (A, B, C, ..., Z, a, b, c, d, e)
- ④: SAMYOUNG's symbol No.
Korea : 1, China : ≤1

< DATE CODE : Sleeve marking. >



- ①②: YEAR : The ending of A.D.
- ③④: WEEKS : 01 ~ 52

C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : **-40 ~ +105 °C**
- B. RATED VOLTAGE : **100 V_{DC}**
- C. SURGE VOLTAGE : **125 V_{DC}**
- D. CAPACITANCE TOLERANCE : **± 20%** at 20 °C, 120Hz
- E. LEAKAGE CURRENT : **Lower 3000 μ A**, after 5 minutes at 20 °C
- F. DISSIPATION FACTOR (Tan δ) : **Lower 0.30** at 20 °C, 120Hz
- G. RATED RIPPLE CURRENT : **3.75 Arms** at 105 °C, 120Hz

H. TEMPERATURE CHARACTERISTIC : **Z(-25 °C) / Z(20 °C) 2**
(Max. Impedance ratio) **Z(-40 °C) / Z(20 °C) 5** (at 120Hz)

- I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage is applied for **2,000 hours at 105 °C**.
- # Capacitance change \leq **±20 %** of the initial value
 - # Tan δ \leq **200 %** of the initial specified value
 - # Leakage current \leq **The initial specified value**

- J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the exposing them at **105 °C** for **1,000 hours** without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.
- # Capacitance change \leq **±20 %** of the initial value
 - # Tan δ \leq **200 %** of the initial specified value
 - # Leakage current \leq **The initial specified value**

K. CLEANING CONDITIONS : Non-solvent proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

