



**PTF45FH**

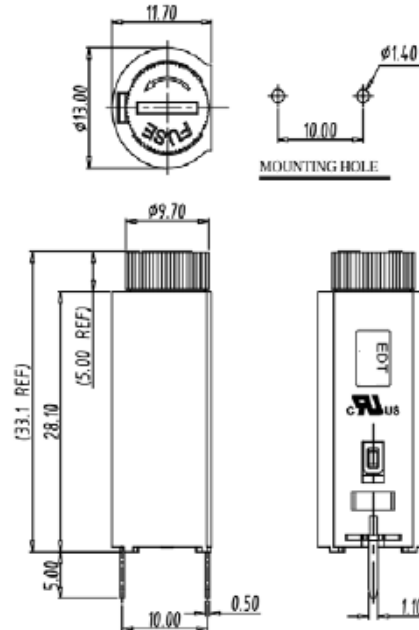

**图示(Pic. shown) : PTF45FH**

General:	Fuse Type	Rated : 250V,10A
	Pin pitch :	10.00mm
	Orientation:	90°(Fuse holder insertion direction to board)
	Screw clamp unit:	--

认证 ( Approval ) : 

技术参数Technical Data	UL standard	IEC standard	
◆ Fuse Type			
RATING	250V, 10A		
◆ TERMINAL BLOCK			
UL应用组别(UL Application group)	UL Application group		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D
额定电压(Rated voltage)	--	--	--
额定电流(Rated current)	--	--	--
额定连接容量(Rated connection capacity)	--	--	--
绝缘材料(Insulation Material)	PBT UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Tin plated		
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	2000V		
额定冲击电压(Rated surge voltage)	--		
保险丝规格(Fuse Type)	Ø5.0*20		
接地螺丝(Grounding Screw) , 扭矩(torque)	--		
剥线长度(Wire stripping length)	--		
使用温度(Operating temperature)	-40°C up to +105°C		