

REV. A	DESCRIPTION NEW RELEASE	DRAWN LL 07/18/06'	CHECKED	APPROVED

NOTES:

1. SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 100mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min










2. PRODUCT NUMBER CODE:

DS1110-01 - X X X X

CONTACT PLATING
6: TIN

COLOR OF HOUSING:
W: WHITE
B: BLACK

No. OF CONTACTS
2: 2pin
4: 4pin

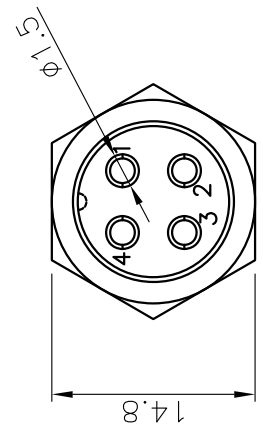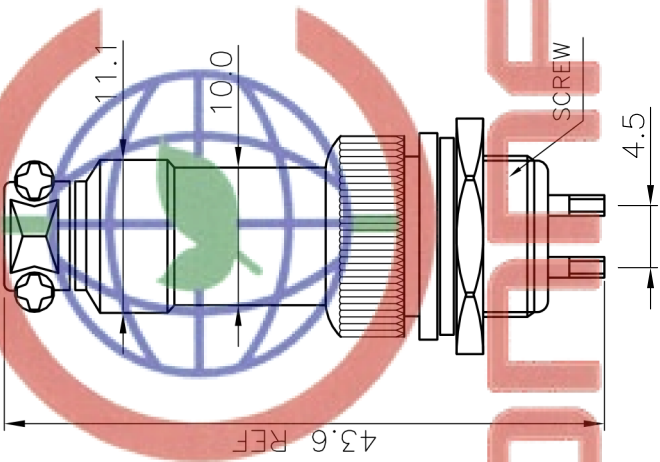

GENERAL TOLERANCE	ANGLE	TOLERANCE	PROJECTION	TITLE	MICRO JACK CONNECTOR
X: ±0.60	X: ±5°		UNITS	mm	
.X: ±0.38	.X: ±3'		SHEET SIZE	A4	SERIES DS1110-01 SERIES
.XX: ±0.25	.XX: ±2'				
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1	OF	1
DRAWING NO.	C-DS1110-01-XXX				

4 PIN

CONNPLY ELECTRONIC CO. LTD
 晨翔电子有限公司
 West Xing Cki
 Tel: 86-574-63508187
 Fax: 86-574-63510817
 P: 5 15321