


XY2500F-M(7.5)

Poles: Any poles (2-24P)
Pitch: 7.5mm 7.62mm

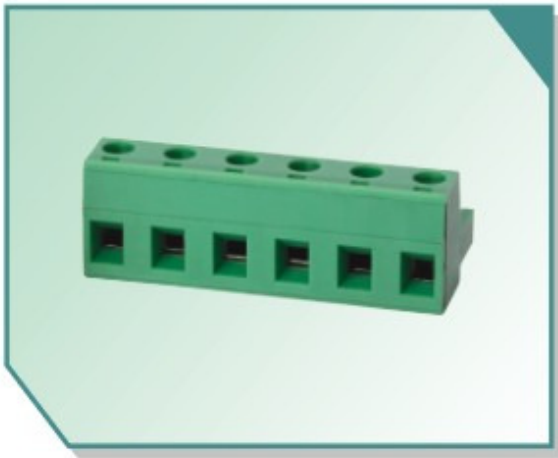

XY2500F-N(7.62)

Voltage Rating: 300V
Current Rating: 12A
Wire range: 18-12AWG 2.5mm²
Housing: PA66(UL 94V-0)
Wire Cage: Brass(Nickel Plated) or
Steel(Zinc plated)
Clamp: Phosphor Bronze, Nickel Plated
Screw: M2.5, Steel(A3), Zinc Plated
Torque: 0.4N.m

额定电压: 300V
额定电流: 12A
使用线径: 18-12AWG 2.5mm²
塑件: 尼龙66 (UL 94V-0)
接触保护材料: 黄铜, 镀镍
或铁, 镀锌
弹片(触点)材料: 磷青铜, 镀镍
螺丝材料: M2.5, A3钢, 镀锌
扭矩: 0.4N.m

