

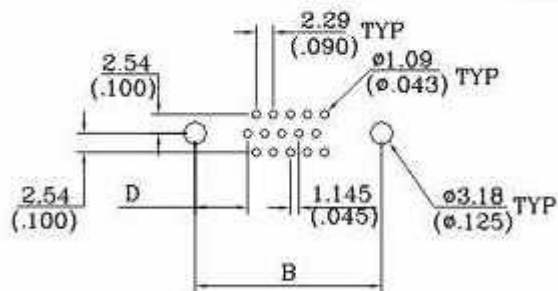
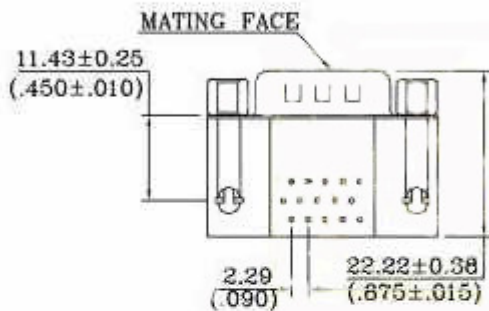
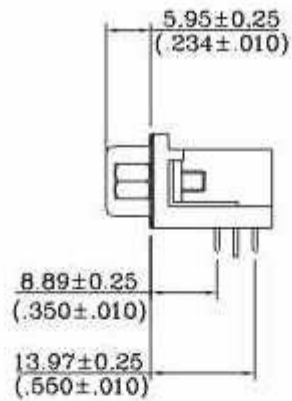


Złącze Canon (D-sub) 3-rzędowe kątowe do druku

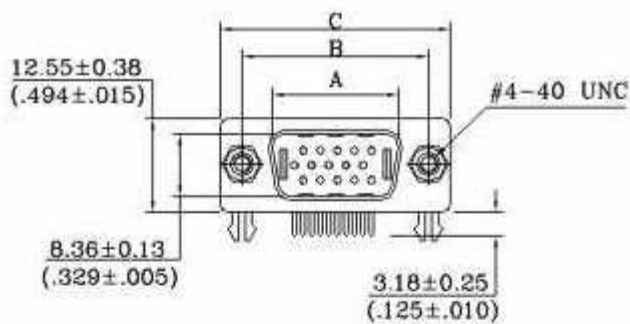

P.C.B LAYOUT (15Pins)

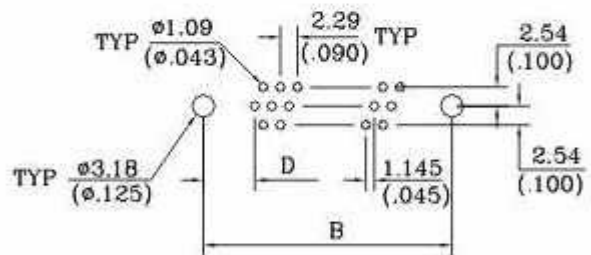

P.C.B LAYOUT(26,44,62Pins)

No. of Contact	A ± 0.25 $\pm .010$	B ± 0.13 $\pm .005$	C ± 0.38 $\pm .015$	D ± 0.13 $\pm .005$
15	16.92 .666	24.99 .984	30.81 1.213	7.04 .277
26	25.25 .994	33.32 1.312	39.14 1.541	6.88 .270
44	38.96 1.534	47.04 1.852	53.04 2.088	6.88 .270
62	55.42 2.182	63.50 2.500	69.32 2.729	6.99 .274