


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/14/07'	~	





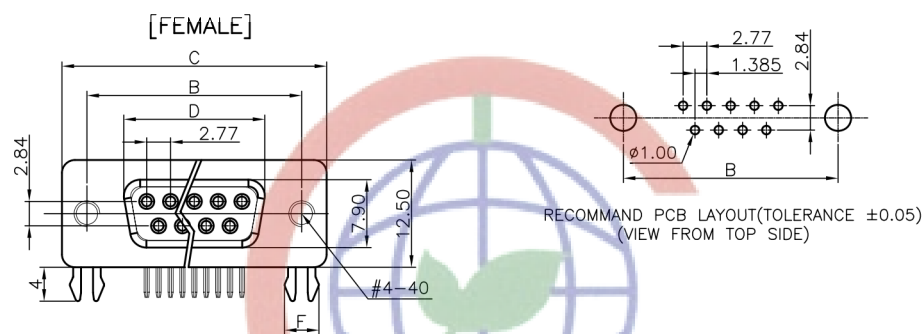


- NOTES: 备注
- PRODUCTS PERFORMANCE:
    - VOLTAGE RATING: 250V AC.
    - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
    - CONTACT RESISTANCE: 20mΩ MAX.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ MIN.
    - OPERATING TEMPERATURE: -20°C~+70°C.

- PRODUCT NUMBER CODE:
 

DS1037 -01- X X X X X X X X

  - SCREW DIM. E
    - 4: 4.80mm
    - 5: 5.80mm
  - BOARD LOCK DIM. F
    - 4: 4.00mm
    - 7: 3.70mm
  - CONTACT PLATING
    - T: SELECTIVE GOLD FLASH
    - Si: FULL GOLD FLASH
    - 6: FULL TIN
  - COLOR OF HOUSING
    - K: BLACK
    - B: BLUE
  - SCREW TYPE
    - A: WITH SCREW TYPE
    - B: WITH RIVET TYPE
    - C: WITH SCREW AND RIVET TYPE
    - D: RIVET TYPE WITH SCREW IN BULD PACKAGE
  - SHELL PLATING
    - N: Nickel
    - T: Tin
  - CONNECTOR TYPE
    - M: MALE
    - F: FEMALE
  - No. OF CONTACT
    - 09: 9pos.
    - 15: 15pos.
    - 25: 25pos.
    - 37: 37pos.

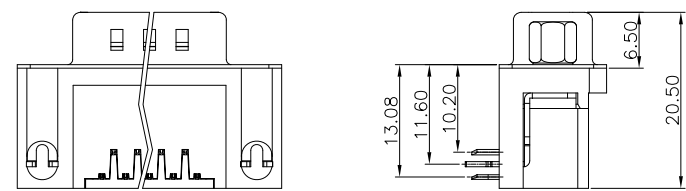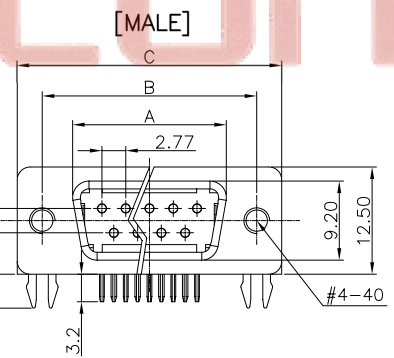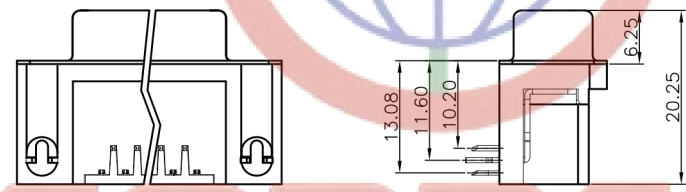

Dimension

Position	A±0.2	B±0.2	C±0.2	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.50	X. ±3'
.X ±0.30	.X ±2'
.XX ±0.20	.XX ±1'

PROJECTION		TITLE	D-SUB RIGHT ANGLE(9.4mm) TYPE
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1037-01 SERIES

DRAWING TYPE	ASSEMBLY
SCALE	1:1
DRAWING NO.	C-DS1037-01-XXXXXX

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-635087  
Fax:86-574-635108  
E-mail:sale@zhenqin.com.cn  
http://www.connfly.com