



## Terminals Series

### KLS8-01114 Short full insulation middle terminal Series

Maximum Electrical Rating: 105°C 600 Volts MAX.  
Insulation Material: VINYL And NYLON  
Connector Material: COPPER

VIII

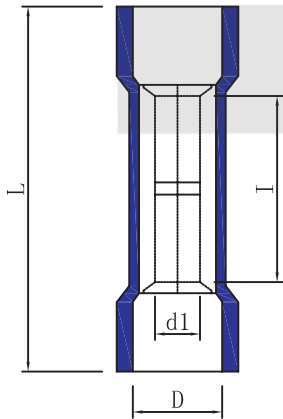

| Item No. | Section of lead |                 | Dimension |          |      | I max | Color  |
|----------|-----------------|-----------------|-----------|----------|------|-------|--------|
|          | AWG             | mm <sup>2</sup> | I         | d1 / D   | L    |       |        |
|          |                 |                 | mm        | mm       | mm   |       |        |
| BV1.25   | 22~16 AWG       | 0.5~1.5         | 15.0      | 1.7/4.0  | 26.0 | 19A   | Red    |
| BV2      | 16~14 AWG       | 1.5~2.5         | 15.0      | 2.3/4.5  | 26.0 | 27A   | Blue   |
| BV5.5    | 12~10 AWG       | 4~6             | 15.0      | 3.4/6.3  | 26.0 | 48A   | Yellow |
| BV8      | 8 AWG           | 8               | 21        | 4.5/8.5  | 32   | 62A   | Red    |
| BV14     | 6 AWG           | 14              | 26        | 5.8/10.5 | 42   | 88A   | Blue   |
| BV22     | 4 AWG           | 22              | 29        | 7.7/12.4 | 50   | 115A  | Yellow |
| BV38     | 2 AWG           | 38              | 32        | 9.5/15.5 | 55   | 160A  | Red    |

## ORDER INFORMATION

KLS8-01114 - BV1.25

Item NO.  
Short full insulation middle terminal Series  
Part Number