



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/20/05'		


HOUSING WITH CONTACT

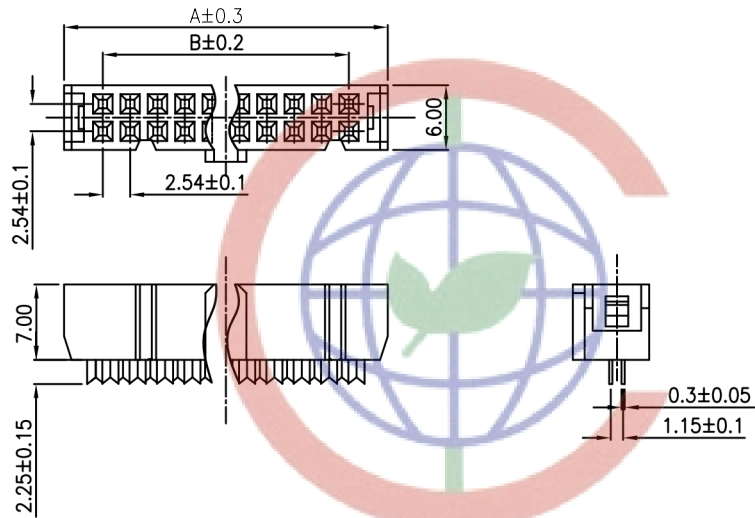

UPPER COVER

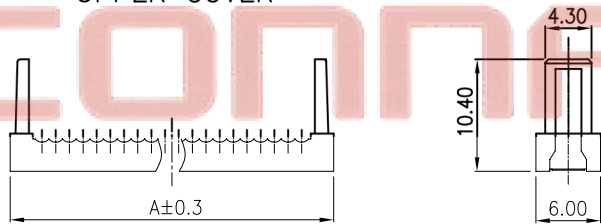

TOP COVER

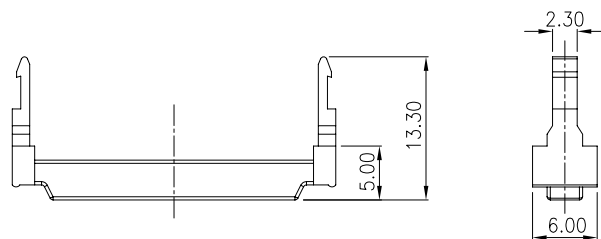

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PART NUMBER: DS1016

4. PRODUCT NUMBER CODE:


DS1016- X X X X X X

- HOUSING COLOR
G:GRAY
B:BLACK
L:BLUE
- TERMINAL MATERIAL
B:BRASS
- CONTACT PLATING
Si:SELECTIVE GOLD FLASH
8:FULL GOLD FLASH
2:Gold flash + Nickel
N:Full Nickel
- POLARIZATION
A:W/
B:W/O
- STRAIN RELIEF
M:W/
N:W/O
- No. OF CONTACTS
08 10 14 16 20
24 26 30 34 40
50 60 64
- SERIES No.
DS1016

Position	Dimension	
	A	B
08	14.82	7.62
10	17.36	10.16
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

TEL: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	UNITS	mm
.X	±0.38	.X	±3°	SHEET SIZE	A4
.XX	±0.25	.XX	±2°	SERIES	DS1016 SERIES
DRAWING TYPE		CUSTOMER		I.D.CSOCKET PITCH 2.54mm	
SCALE	1:1	SHEET	1 OF 1	ADD.: West Yuhang Road, Ningbo City, Zhejiang Province, China	
DRAWING NO.	C-DS1016-XXXXXX		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		